

## PRODUCTSPECIFICATION

**Art. name: NLP plastic half pallet P2**

**Art. number: 0003**

**EPD number: 2631828**



### PRODUCT DESCRIPTION

Dimensions (mm) +/- 3 mm	
Length	800
Width	600
Height	150



Weight	8,4 kg. +/- 2 %
Dynamic weight	600 kg.
Static weight	2500 kg.
Racking	Always use a slave pallet underneath.

Materials pallet	Highdensity-polyetylen (HDPE)
Reinforcements	Four galvanized steelbeams together with two glassfiber bars.
Recycled materials	Recycled raw material of highdensity-polyetylen can be mixed in.
Temperatures	-40 °C to +70 °C
Recyclable	Yes
Lifespan	10 years

Kapittel: 0303	Dok nr: 14	Vers nr: 01	Gyldig fra: 06.12.19	Utarbeidet av: SMSS	Godkjent av: FK	Side 1 av 3
----------------	------------	-------------	-------------------------	------------------------	--------------------	-------------

## PRODUCTSPECIFICATION

<b>RFID &amp; BARCODE</b>	<p>The plastic half pallet is equipped with two RFID- and barcode tags, one on each short side. See picture for placement.</p> <p>For more information about RFID please visit: <a href="http://www.nlpool.no">www.nlpool.no</a>.</p>
---------------------------	---

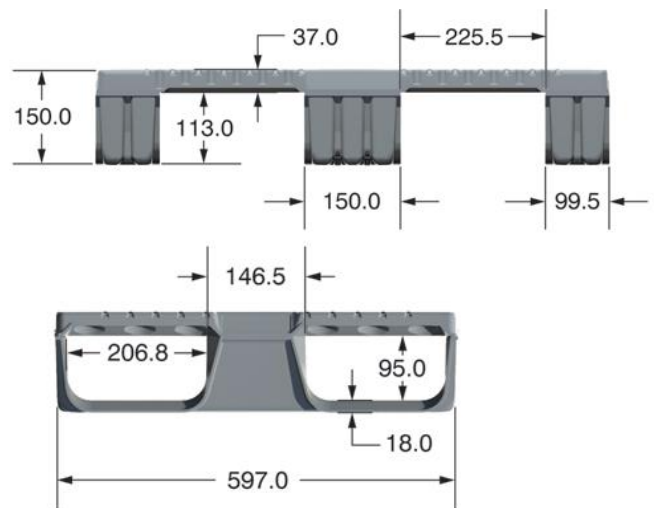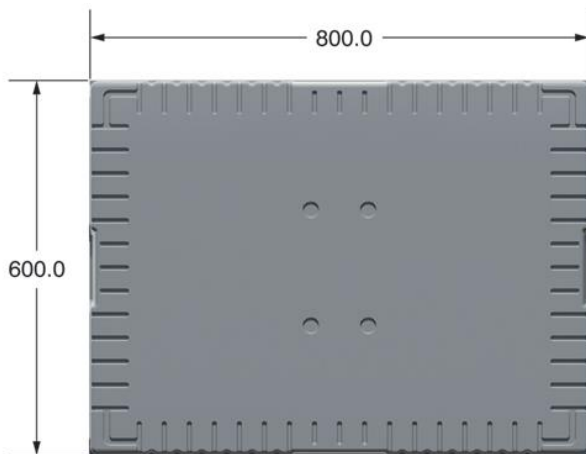

Placement of reinforcement beams



Kapittel: 0303	Dok nr: 14	Vers nr: 01	Gyldig fra: 06.12.19	Utarbeidet av: SMSS	Godkjent av: FK	Side 2 av 3
----------------	------------	-------------	-------------------------	------------------------	--------------------	-------------

### LABELING OF PLASTIC HALF PALLET

Do not staple, attach or glue anything to the plastic half pallet that may harm surfaces or make visible holes. Furthermore, do not use any paint, ink or any other substances that might discolour the pallet or mark the plastic half pallet. Labels and other markings can only be applied if they are completely removed before the plastic half pallet continues in the supply chain.

### WASHING THE PLASTIC HALF PALLET

The plastic pallets are only to be washed by NLP in the following way:

The plastic pallet is washed in a tunnel washer specifically designed for pallets, where foreign objects and label residue are removed to the best its ability.

Washing temperature: ca. 50° C

Chemicals: Titan XL, added 0,2-1,5%

### DELIVERY

The plastic half pallet is available in two different conditions, NLP quality and washed. Both of which comes in stacks of 32 pallets per transport unit. For more information please visit: [www.nlpool.no](http://www.nlpool.no).

Kapittel: 0303	Dok nr: 14	Vers nr: 01	Gyldig fra: 06.12.19	Utarbeidet av: SMSS	Godkjent av: FK	Side 3 av 3
----------------	------------	-------------	-------------------------	------------------------	--------------------	-------------